

Submittal Data Sheet

Project Name:
Location:
Engineer:
Submitted to:
Submitted by:
Reference:

Approval:
Date:
Construction:
Jnit #:
Drawing #:

Performance

XNQ12MVJU9
12000
8300
0.079
13500
0.079

Indoor Unit Type:	Floor Standing (Concealed)
Rated Cooling Conditions	Indoor: 80°F DB/67°F WB
	Ambient: 95°F DB/75°F WB
Rated Heating Conditions	Indoor: 70°F DB/60°F WB
	Ambient: 47°F DB/43°F WB
Rated Piping Length (ft)	25
Rated Height Separation (ft)	0

Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	0.5
Max. Overcurrent Protection (MOP) (A):	15
Dimensions (HxWxD):	24x42-1/8x8-5/8
Panel (HxWxD):	N/A
Net Weight (lbs):	51
Net Weight with Panel (lbs):	

Airflow Rate (CFM wet coil)	280//210
Moisture Removal (pt/h):	
Gas Pipe Connection (inch):	1/2
Liquid Pipe Connection (inch):	1/4
Condensate Connection (inch):	53/64
Sound Pressure Level (dBA):	36
Sound Power Level (dBA):	
External Static Pressure/Max (inWg):	0 / 0
Controller Name:	



FXNQ12MVJU9

Std U.S. Warranty: 7yrs Compressor, 1yrs Parts

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006

Daikin AC TRL Generated Submittal Data




Submittal Data Sheet

FXNQ12MVJU9

Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	

Dimensional Drawing - Indoor Unit

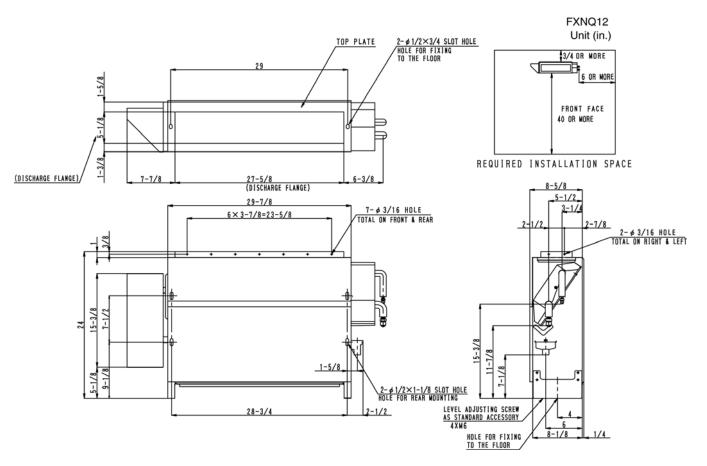

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006

Daikin AC TRL Generated Submittal Data